


# SS-3050

## Technical Data

| MODEL              |                     | SS-3050-100         |
|--------------------|---------------------|---------------------|
| Capacity           | Pay Load            | 3.0 Ton             |
|                    | Max. Speed          | 100 M/min           |
|                    | Max. Lifting Height | 300 ~ 500 M         |
| Electrical Data    | Motor               | 28Kw x 2            |
|                    | Brake               | DC 190 V            |
|                    | MCCB                | 150 A               |
|                    | KVA                 | 80 KVA              |
|                    | Power supply        | 440V. 50/60Hz       |
| Size               | Cage( W x L x H )   | 1.5M x 5.0M x 2.65M |
|                    | Mast( W x L x H )   | 0.9M x 0.65M x 1.5M |
| Driving Method     |                     | Rack & Pinion       |
| Safety Device Type |                     | LSD 100             |
| Running Control    |                     | Frequency (75Kw)    |
| Tie in Interval    |                     | 12 M                |

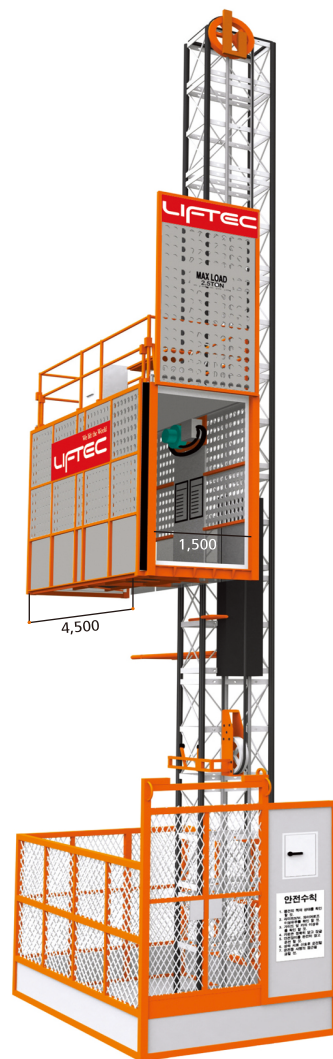

## We lift the World

The core of LIFTEC is 'People'  
 The fundamental of LIFTEC is 'Safety'  
 The essence of LIFTEC is 'Technology'